
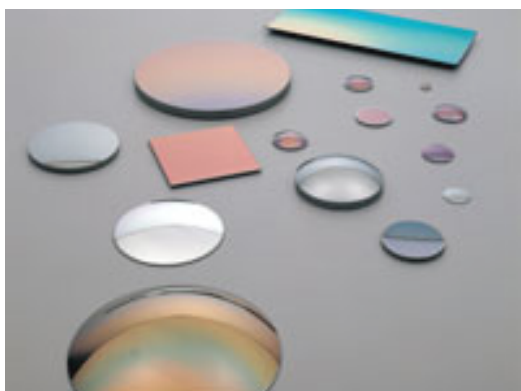


VIAVI

Infrared Narrow Bandpass Filters

VIAVI Solutions infrared narrow bandpass filters provide high transmission in specified wavelength regions and extremely high rejection outside the band. Bandpass center wavelengths can be located anywhere in the region from 1 μm to 16 μm . Filter designs are available on a variety of infrared transmitting substrates.

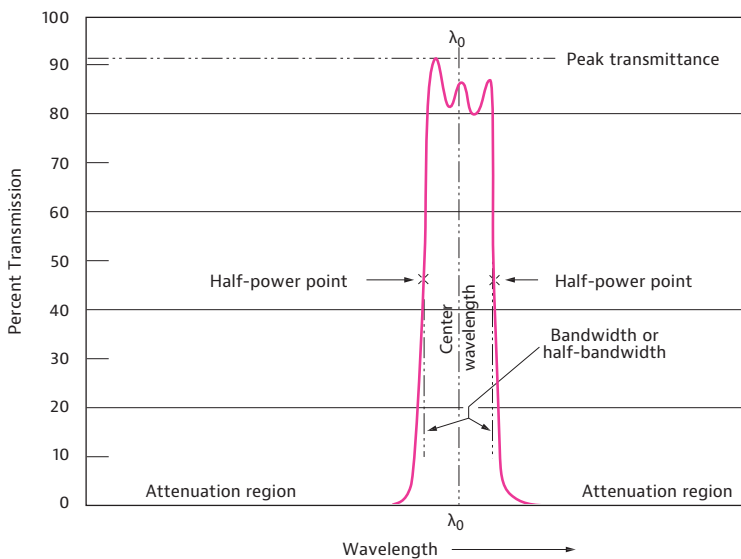

Key Features

- Excellent coating uniformity
- Tightly toleranced precision filter expertise
- Flat spectral profile
- High peak transmission value
- Excellent blocking
- Wide range of filters and assemblies for infrared sensing and imaging instrumentation markets
- High-volume capability
- Expert application engineering support
- Available filter substrates: silicon, germanium, glass, sapphire, quartz, fused silica, zinc sulfide, zinc selenide

Applications

- Environmental monitoring
- Anaesthesia monitoring
- Temperature sensing
- Thermal imaging

Standard

- Temperature, humidity, mild abrasion, adherence: MIL-F-48616

Spectral Characteristics

Parameter	Symbol	Conditions	Minimum	Maximum
Wavelength range ¹	λ_0	At 25°C, 0° AOI	1 μm	16 μm
Center wavelength tolerance	%	At 25°C, 0° AOI	$\pm 0.25\%$	$\pm 2\%$
Nominal bandwidth ¹	HBW	At 25°C, 0° AOI	1%	10%
Cut-on/Cut-off slope ^{1,2}		At 25°C, 0° AOI	1%	3%
Absolute center wavelength drift vs temperature			0.002%/°C	0.01%/°C

¹AOI: angle of incidence.

²Cut-on/cut-off slopes $\geq 2\%$ are for standard designs and are consistent with standard production yields.

Minimum Average Peak Transmission

Center Wavelength Range	Nominal Bandwidth 1% to 1.5%	Nominal Bandwidth 2% to 2.5%	Nominal Bandwidth 4% to 5.5%	Nominal Bandwidth 8% to 10%
1 to 1.25 μm	55%	65%	70%	45%
1.25 to 2.5 μm	50%	60%	60%	55%
2.5 to 5.5 μm	55%	65%	70%	70%
5.5 to 11.5 μm	60%	65%	75%	80%
11.5 to 12.5 μm	50%	55%	65%	80%
12.5 to 13.5 μm	50%	55%	65%	65%
13.5 to 14.5 μm	40%	50%	55%	65%
14.5 to 15.5 μm	30%	35%	45%	65%

¹All peak transmission values are minimal and consistent with standard production yields.

²Higher transmission values are available upon request if filters do not have to be completely attenuated outside the bandpass.

³All transmission values are for filters attenuated above and below bandpass to $T \leq 0.1\%$ average.

Filter Size

Type	Conditions	Minimum	Maximum
Square or rectangle	$\Delta\lambda_0 \leq 1\%$	2 mm	50 mm
Square or rectangle	$\Delta\lambda_0 \leq 1\%$	2 mm	100 mm
Diameter		2 mm	150 mm
Thickness		0.3 mm	-
Thickness tolerance ¹		± 0.025 mm	-

¹Thickness tolerance for standard design is ± 0.1 mm.



Americas +1 800 254 3684
 Europe +33 1 30 81 50 41
 Asia Pacific +86 512 6956 7895
 E-mail ospcustomerservice@viavisolutions.com

© 2021 VIAMI Solutions Inc.
 Product specifications and descriptions in this document are subject to change without notice.
 Patented as described at viavisolutions.com/patents
 irnbp-ds-co-ae
 30137509 903 0813